

Xtreme⁺ (AG)

μc-Si tandem PV module

Product Specifications:

Model	NT - 160AG	NT - 155AG	NT - 150AG
Nominal Power [W] [-0/+3%]	160	155	150
Open Circuit Voltage [V]	85.5	85.5	85.5
Short Circuit Current [A]	2.57	2.56	2.54
Maximum Power Voltage [V]	65.9	65.2	64.7
Maximum Power Current [A]	2.43	2.38	2.32
Initial Values	Pmax: Refer to installation manual Voc: Approximately 2% higher than stabilized voltage		
Maximum System Voltage [V]	1000	1000	1000
Dimension [mm]	1400*1100*6.8		
Weight [Kg]	25		
Connector	MC 4 / MC 4 Compatible		
Cable Size [mm ²]	2.5		

Temperature Coefficients:

Nominal Power [W]	-0.28% / °C
Open Circuit Voltage [V]	-0.32% / °C
Short Circuit Current [A]	0.07% / °C


- Data above represent stabilized values at Standard Test Conditions (STC) [Irradiance: 1000 W/m², Spectrum: AM1.5, Cell temperature: 25°C (77°F)].
- All electrical ratings bear with a tolerance of ±10% unless specified otherwise. Specifications are for reference only and subject to changes without notice.
- Visible patterns on front side which will not affect module performance against NexPower warranty or impact functionality are allowed.
- Power warranty:
Maintain more than 90% of minimum rated power for 10 years.
Maintain more than 80% of minimum rated power for 25 years.
Product warranty: free from defects for 5 years.
- NexPower reserves the right to revise this document or withdraw it at any time without prior notice.

Xtreme⁺ (AG)


μc-Si tandem PV module

Certifications

- IEC 61646/61730
- CE
- ISO 9001:2008
- ISO 14001:2004

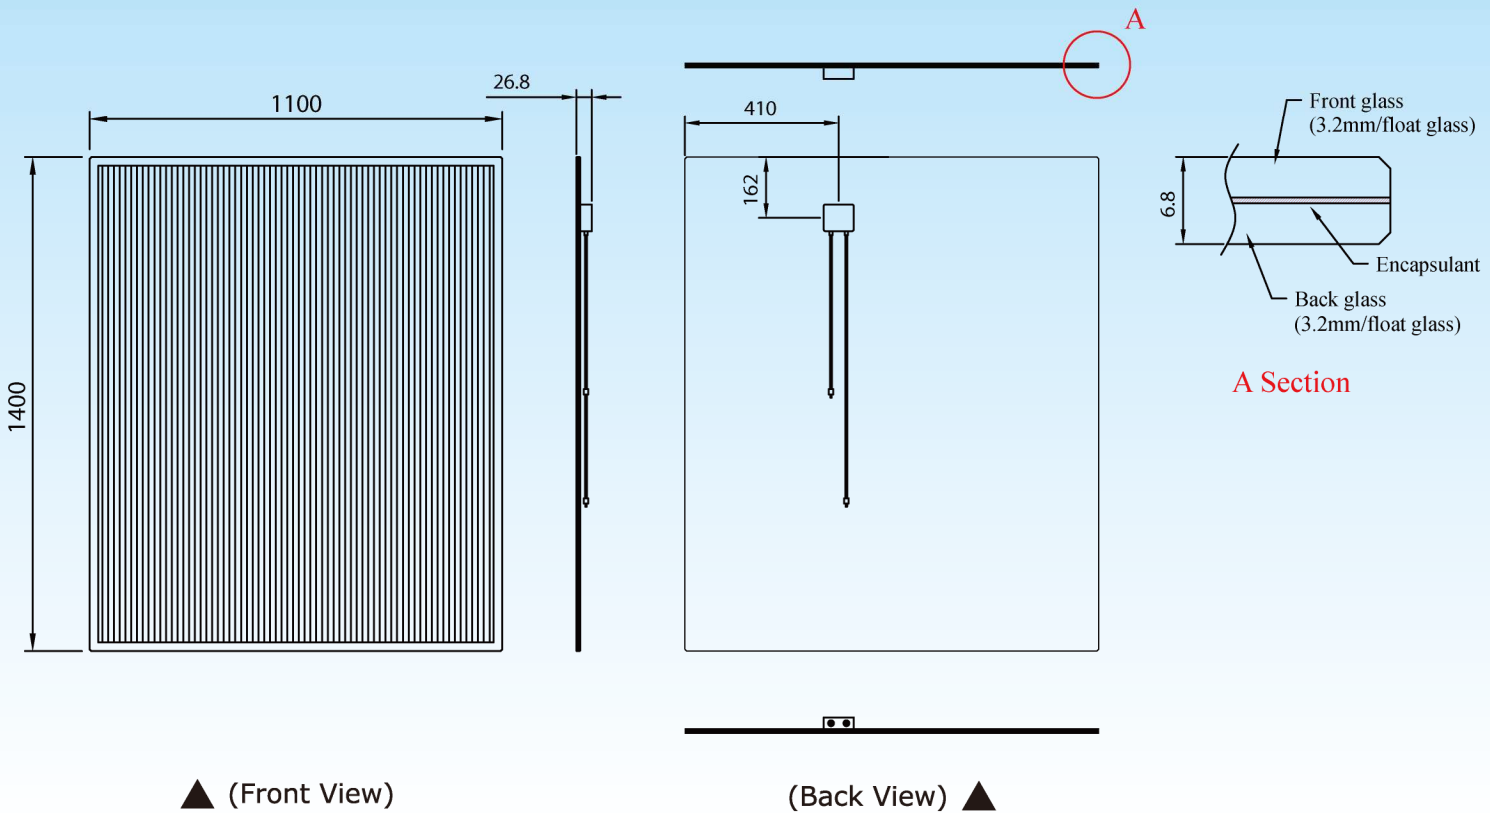

Current v.s.Voltage Characteristics
(Cell temperature : 25°C)

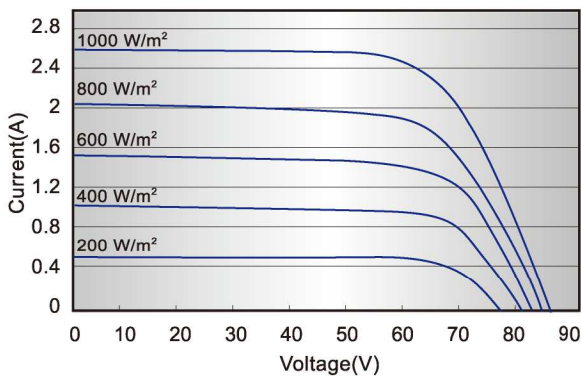

Current v.s.Voltage Characteristics
(Irradiance : 1000 W/m²)

